


BETA 195

Max.: 193 l/min - 51 GPM - 50 bar - 725 PSI - 550 RPM

TS 2C BETA 195 cod. 440002




MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Peso <i>Weight</i>	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
BETA 195	400	147.0	38.9	1.4	1.0	144.8	38.3	7.7	5.8	143.5	37.9	11.3	8.4	142.2	37.6	14.8	11.0	141.0	37.2	18.4	13.7	58.5	129.0
	450	166.0	43.8	1.6	1.2	162.8	43.0	8.7	6.5	161.3	42.6	12.7	9.5	159.9	42.2	16.6	12.4	158.4	41.9	20.6	15.4		
	500	180.0	47.6	1.7	1.3	177.1	46.8	9.5	7.1	175.5	46.4	13.9	10.3	174.0	46.0	18.2	13.6	172.4	45.5	22.5	16.8		
	550	193.0	51.0	1.8	1.4	189.5	50.1	10.1	7.6	187.8	49.6	14.8	11.0	186.2	49.2	19.5	14.5	185.0	48.9	23.7	17.7		

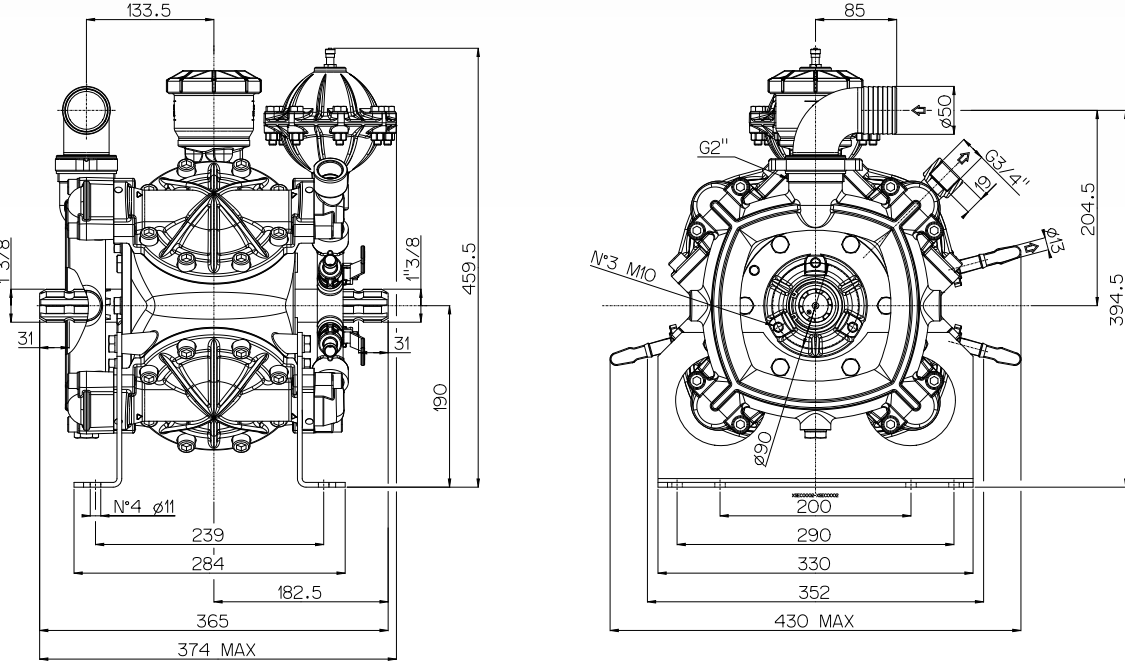

Versioni Versions

TS 2C BETA 195 cod. 440002

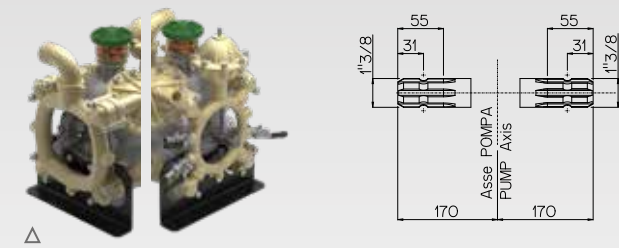

Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for
hydraulic motor



MI Δ
vedi pag 92 see page 92

Gruppi regolazione pressione Pressure control units

VRG 255

UHP



vedi pag. 84-85 see pages 84-85