

OMEGA 139


Max.: 137 l/min - 37 GPM • 50 bar - 725 PSI • 550 RPM

TS 2C OMEGA 139 cod. 840500



Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
cod. 090361

MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Peso <i>Weight</i>	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
OMEGA 139	400	101.8	26.9	1.0	0.7	98.5	26.0	5.2	3.8	97.4	25.7	7.6	5.6	96.3	25.4	9.9	7.3	95.3	25.2	12.2	9.0	29.0	63.9
	450	113.6	30.0	1.1	0.8	110.0	29.1	5.8	4.3	108.9	28.8	8.5	6.2	107.8	28.5	11.1	8.1	106.8	28.2	13.7	10.1		
	500	126.8	33.5	1.3	0.9	121.2	32.0	6.4	4.7	120.1	31.7	9.4	6.9	119.0	31.4	12.2	9.0	118.0	31.2	15.1	11.1		
	550	137.0	37.0	1.4	1.0	132.2	34.9	7.0	5.1	131.1	34.6	10.2	7.5	130.0	34.3	13.3	9.8	129.0	34.1	16.5	12.2		

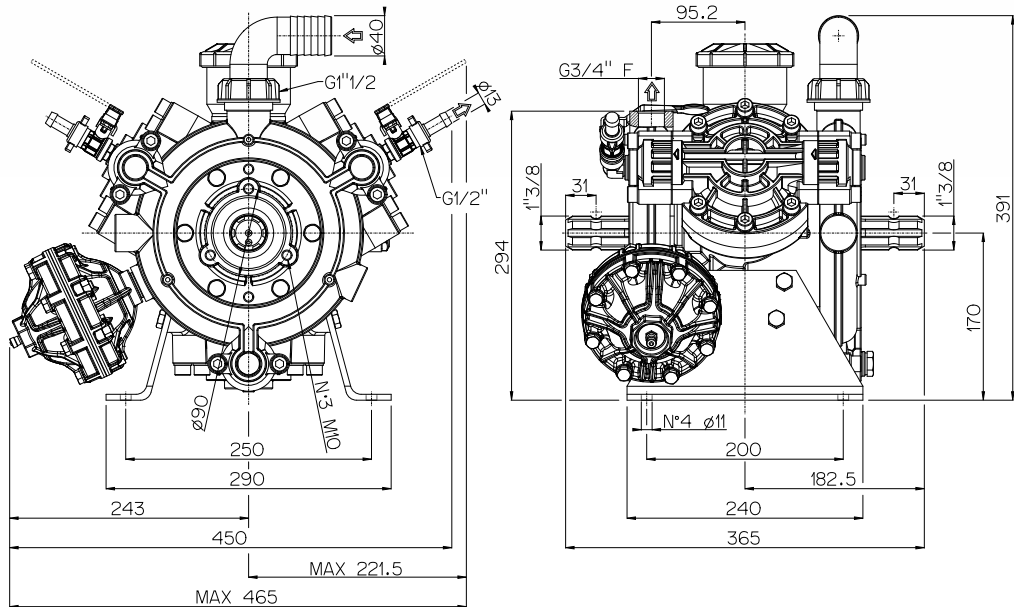


Versioni Versions

TS 2C OMEGA 139 cod. 840500



Δ



Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for
hydraulic motor



MI Δ
vedi pag 92 see page 92

Gruppi regolazione pressione Pressure control units

vedi pag. 84-85 see pages 84-85

ZX



VRG 155



UHP

