

BETA 130


BETA 130

Max.: 128 l/min - 34 GPM • 50 bar - 725 PSI • 550 RPM

TS 2C BETA 130 cod. 820200




MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Peso <i>Weight</i>	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
BETA 130	400	96.0	25.4	1.0	0.7	93.0	24.6	4.9	3.6	92.6	24.5	7.2	5.3	92.2	24.4	9.5	7.0	91.8	24.3	11.8	8.7	45.0	99.2
	450	107.5	28.4	1.1	0.8	104.3	27.6	5.5	4.0	103.8	27.4	8.1	5.9	103.3	27.3	10.6	7.8	102.8	27.2	13.2	9.7		
	500	118.2	31.2	1.2	0.9	114.5	30.3	6.0	4.4	114.0	30.1	8.9	6.5	113.5	30.0	11.6	8.6	113.0	29.9	14.5	10.6		
	550	128.0	34.0	1.3	0.9	123.0	32.5	6.5	4.8	122.5	32.4	9.5	7.0	122.0	32.2	12.5	9.2	121.5	32.1	15.6	11.4		

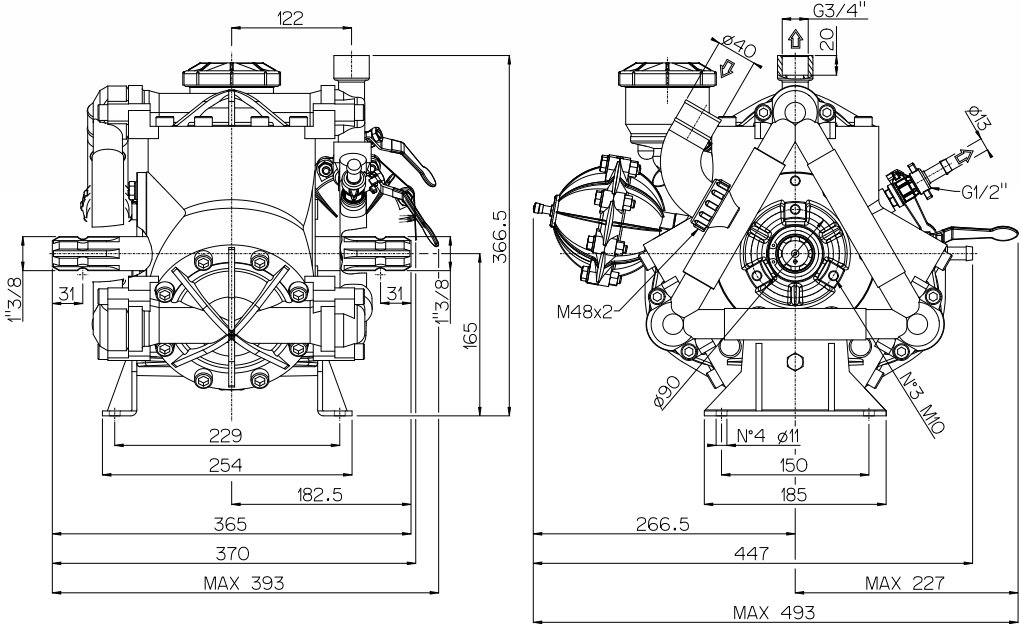

Versioni Versions

TS 2C BETA 130 cod. 820200

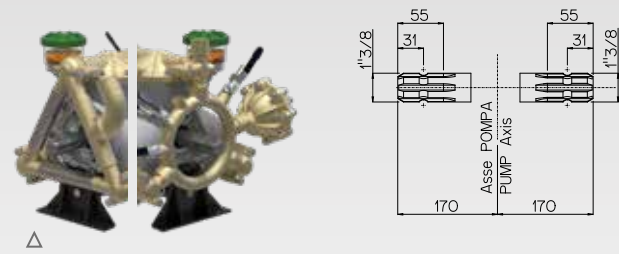

Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for
hydraulic motor



MI Δ
vedi pag 92 see page 92

Gruppi regolazione pressione Pressure control units

vedi pag. 84-85 see pages 84-85

