

BETA 170

BETA 170



Max.: 170 l/min - 45 GPM • 50 bar - 725 PSI • 550 RPM

TS 2C BETA 170 cod. 822200





Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
cod. 090362

MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Peso <i>Weight</i>	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
BETA 170	400	127.5	33.7	1.3	0.9	123.9	32.7	6.5	4.8	123.0	32.5	9.6	7.0	122.1	32.3	12.5	9.2	121.2	32.0	15.5	11.4	52.0	114.6
	450	143.2	37.8	1.4	1.1	139.2	36.8	7.3	5.4	138.2	36.5	10.8	7.9	137.2	36.2	14.1	10.3	136.2	36.0	17.5	12.8		
	500	157.5	41.6	1.6	1.2	151.8	40.1	8.0	5.9	150.6	39.8	11.7	8.6	149.4	39.5	15.3	11.3	148.2	39.2	19.0	14.0		
	550	170.0	45.0	1.7	1.2	162.7	43.0	8.6	6.3	161.3	42.6	12.6	9.2	159.9	42.2	16.4	12.1	158.5	41.9	20.3	14.9		

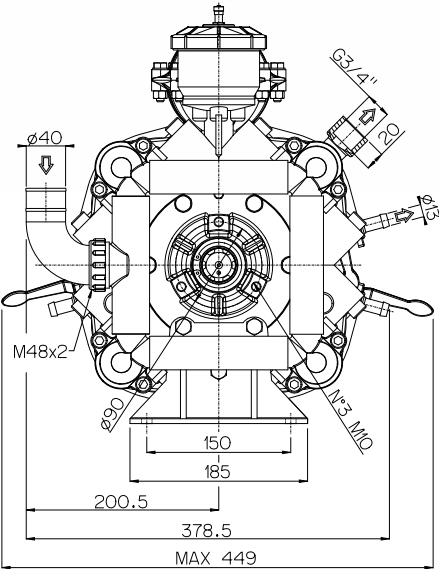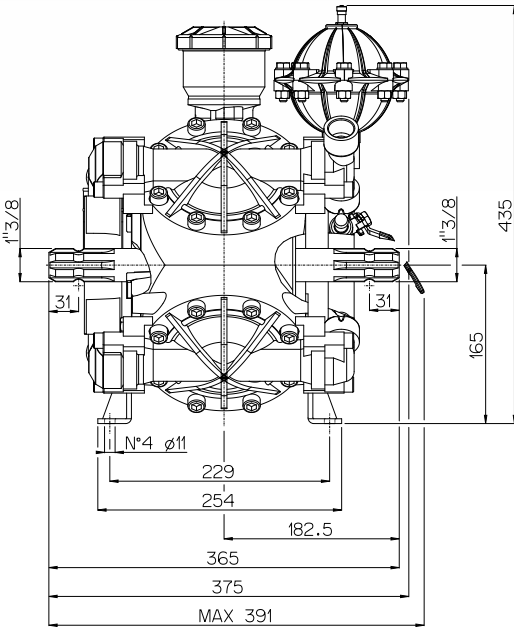

Versioni Versions

TS 2C BETA 170 cod. 822200



Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for hydraulic
motor



MI
vedi pag 92 see page 92

Gruppi regolazione pressione Pressure control units

VRG 255

UHP



vedi pag. 84-85 see pages 84-85