


BETA 200 BETA 240

BETA 200
BETA 240

Max.: 218 l/min - 58 GPM · 50 bar - 725 PSI · 550 RPM


Max.: 243 l/min - 65 GPM · 50 bar - 725 PSI · 550 RPM

TS 2C BETA 200 cod. 835102
 BETA 240 cod. 835202

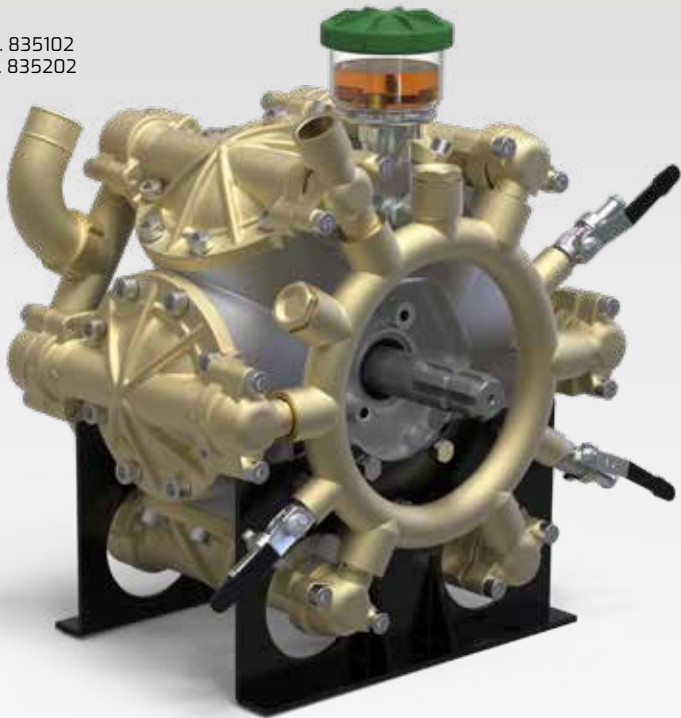


Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
cod. 090362

MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata		Potenza		Portata		Potenza		Portata		Potenza		Portata		Potenza		Portata		Potenza		Peso	
		Flow rate		Power		Flow rate		Power		Flow rate		Power		Flow rate		Power		Flow rate		Power		Weight	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
BETA 200	400	162.7	43.0	1.6	1.2	155.6	41.1	8.2	6.0	153.8	40.6	12.0	8.8	152.0	40.2	15.6	11.5	150.2	39.7	19.3	14.2	72.0	158.7
	450	182.0	48.1	1.8	1.3	174.9	46.2	9.2	6.8	173.0	45.7	13.5	9.9	171.1	45.2	17.5	12.9	169.2	44.7	21.7	15.9		
	500	200.5	53.0	2.0	1.5	193.4	51.1	10.2	7.5	191.4	50.6	14.9	11.0	189.4	50.0	19.4	14.3	187.4	49.5	24.0	17.7		
	550	218.0	58.0	2.2	1.6	210.9	55.7	11.1	8.2	208.8	55.2	16.3	12.0	206.7	54.6	21.2	15.6	204.6	54.1	26.2	19.3		
BETA 240	400	189.2	50.0	1.9	1.4	183.2	48.4	9.6	7.1	181.6	48.0	14.2	10.4	180.0	47.6	18.5	13.6	178.4	47.1	22.9	16.8	72.0	158.7
	450	211.3	55.8	2.1	1.6	205.3	54.2	10.8	7.9	203.7	53.8	15.9	11.7	202.1	53.4	20.7	15.2	200.5	53.0	25.7	18.9		
	500	230.1	60.8	2.3	1.7	224.1	59.2	11.8	8.7	222.5	58.8	17.3	12.7	220.9	58.4	22.7	16.7	219.3	57.9	28.1	20.7		
	550	243.0	65.0	2.4	1.8	237.0	62.9	12.5	9.2	235.4	62.2	18.3	13.5	233.8	61.8	24.0	17.6	232.2	61.3	29.8	21.9		

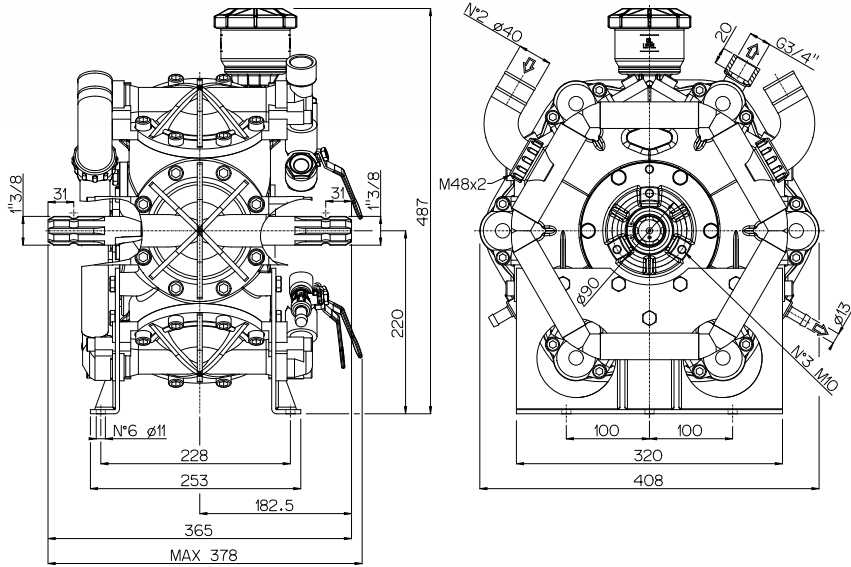

Versioni *Versions*

TS 2C BETA 200 cod. 835102 - BETA 240 cod. 835202



Applicazioni *Shaft adaptors*

Applicazioni motori
idraulici
*Shaft adaptors for hydraulic
motor*



MI Δ
vedi pag 92 see page 92

Gruppi regolazione pressione *Pressure control units*

VRG 255



vedi pag. 85 see page 85