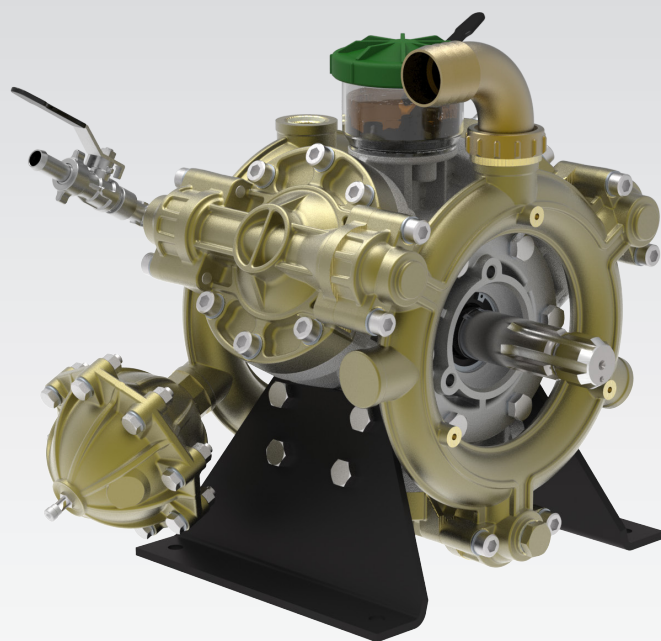


BETA-S 135



max. 137 l/min - 36.2 GPM • 50 bar - 725 PSI • 550 RPM

TS 2C

BETA-S 135 cod. 816200


 Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
 cod. 090361



RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
	Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Peso Weight	
	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
400	101.8	26.9	1.0	0.7	98.5	26.0	5.2	3.8	97.4	25.7	7.6	5.6	96.3	25.4	9.9	7.3	95.3	25.2	12.2	9.0	29.0	63.9
450	113.6	30.0	1.10	0.8	110.0	29.1	5.8	4.3	108.9	28.8	8.5	6.2	107.8	28.5	11.1	8.1	106.8	28.2	13.7	10.1		
500	126.8	33.5	1.3	0.9	121.2	32.0	6.4	4.7	120.1	31.7	9.4	6.9	119.0	31.4	12.2	9.0	118.0	31.2	15.1	11.1		
550	137.0	36.2	1.4	1.0	132.2	34.9	7.0	5.1	131.1	34.6	10.2	7.5	130.0	34.3	13.3	9.8	129.0	34.1	16.5	12.2		

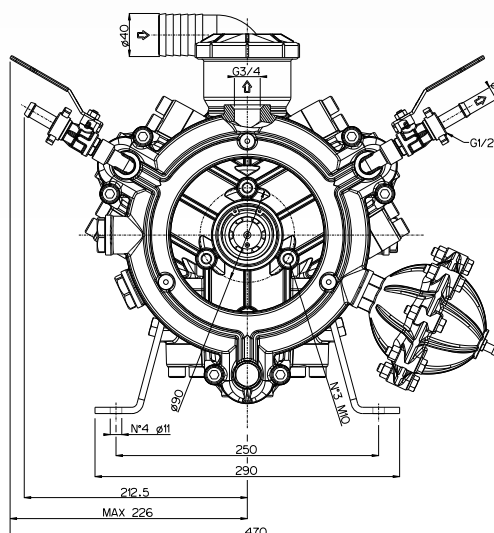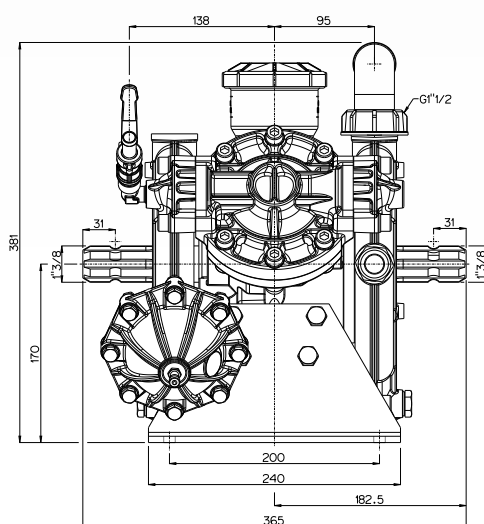

BETA-S 135

Versioni Versions

TS 2C cod. 816200

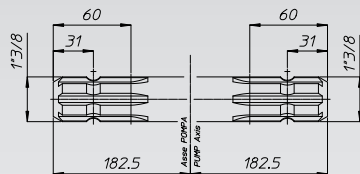

Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for
hydraulic motor



MI Δ
vedi pag 94 see page 94

Gruppi regolazione pressione Pressure control units

vedi pag 80 see page 80

ZX

VRG 155

UHP

