


BETA 110



max. 128 l/min - 34 GPM · 50 bar - 725 PSI · 550 RPM

TS 2C BETA 110 cod. 820200

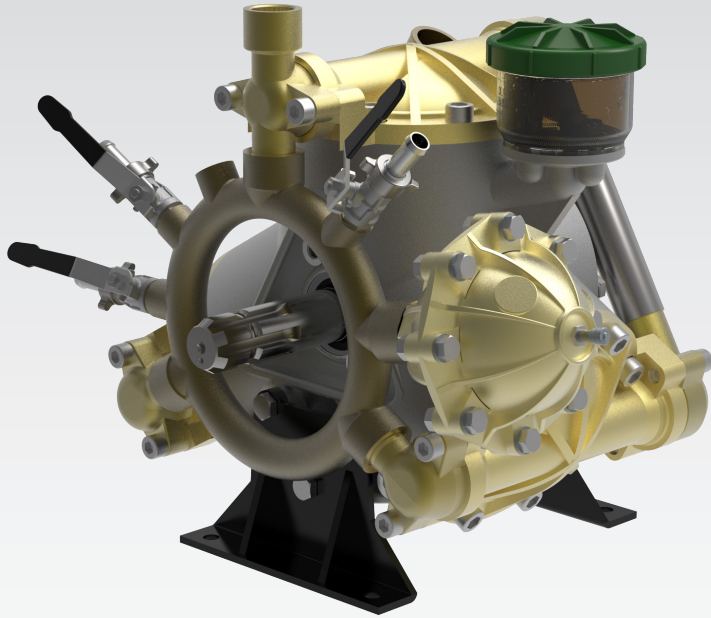



Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
 cod. 090362

RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI				Peso Weight	
	Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power			
	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	45.0	99.2
400	96.0	25.4	1.0	0.7	93.0	24.6	4.9	3.6	92.6	24.5	7.2	5.3	92.2	24.4	9.5	7.0	91.8	24.3	11.8	8.7		
450	107.5	28.4	1.1	0.8	104.3	27.6	5.5	4.0	103.8	27.4	8.1	5.9	103.3	27.3	10.6	7.8	102.8	27.2	13.2	9.7		
500	118.2	31.2	1.2	0.9	114.5	30.3	6.0	4.4	114.0	30.1	8.9	6.5	113.5	30.0	11.6	8.6	113.0	29.9	14.5	10.6		
550	128.0	34.0	1.3	0.9	123.0	32.5	6.5	4.8	122.5	32.4	9.5	7.0	122.0	32.2	12.5	9.2	121.5	32.1	15.6	11.4		

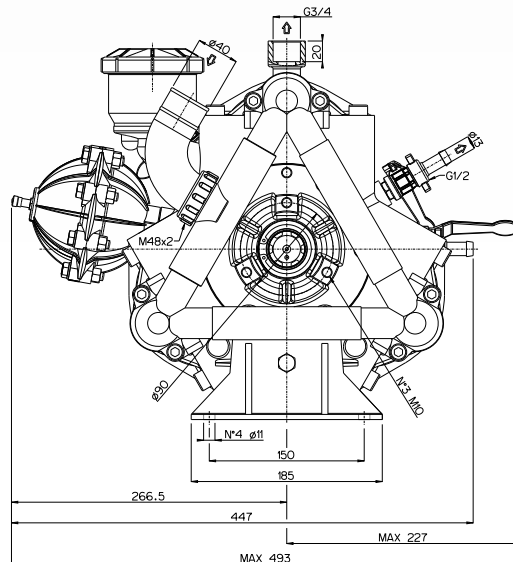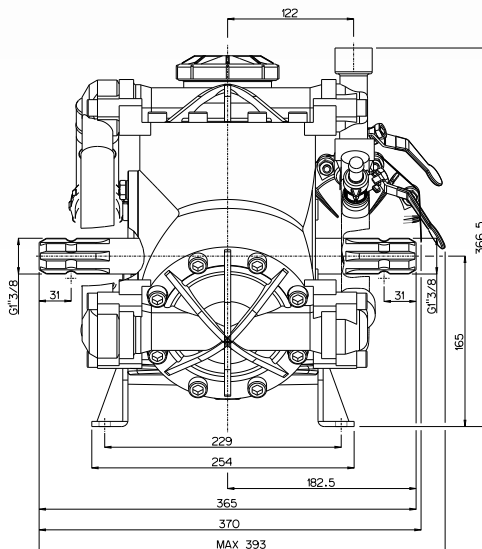

Versioni Versions

TS 2C cod. 820200

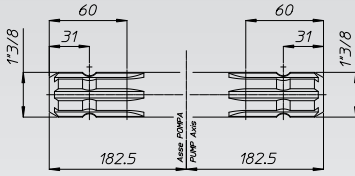

Applicazioni Shaft adaptors

Applicazioni motori
idraulici
Shaft adaptors for
hydraulic motor



MI Δ
vedi pag 94 see page 94

Gruppi regolazione pressione Pressure control units

vedi pag 80 see page 80

ZX

VRG 155

UHP

