

BETA 200

BETA 240

max. 218 l/min - 58 GPM • 50 bar - 725 PSI • 550 RPM



max. 243 l/min - 65 GPM · 50 bar - 725 PSI · 550 RPM

TS 2C BETA 200 cod. 835102
BETA 240 cod. 835202



Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
cod. 090362

MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Portata <i>Flow rate</i>		Potenza <i>Power</i>		Peso <i>Weight</i>	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
BETA 200	400	162.7	43.0	1.6	1.2	155.6	41.1	8.2	6.0	153.8	40.6	12.0	8.8	152.0	40.2	15.6	11.5	150.2	39.7	19.3	14.2	72	158.7
	450	182.0	48.1	1.8	1.3	174.9	46.2	9.2	6.8	173.0	45.7	13.5	9.9	171.1	45.2	17.5	12.9	169.2	44.7	21.7	15.9		
	500	200.5	53.0	2.0	1.5	193.4	51.1	10.2	7.5	191.4	50.6	14.9	11.0	189.4	50.0	19.4	14.3	187.4	49.5	24.0	17.7		
	550	218.0	58.0	2.2	1.6	210.9	55.7	11.1	8.2	208.8	55.2	16.3	12.0	206.7	54.6	21.2	15.6	204.6	54.1	26.2	19.3		
BETA 240	400	189.2	50.0	1.9	1.4	183.2	48.4	9.6	7.1	181.6	48.0	14.2	10.4	180.0	47.6	18.5	13.6	178.4	47.1	22.9	16.8	72	158.7
	450	211.3	55.8	2.1	1.6	205.3	54.2	10.8	7.9	203.7	53.8	15.9	11.7	202.1	53.4	20.7	15.2	200.5	53.0	25.7	18.9		
	500	230.1	60.8	2.3	1.7	224.1	59.2	11.8	8.7	222.5	58.8	17.3	12.7	220.9	58.4	22.7	16.7	219.3	57.9	28.1	20.7		
	550	243.0	65.0	2.4	1.8	237.0	62.9	12.5	9.2	235.4	62.2	18.3	13.5	233.8	61.8	24.0	17.6	232.2	61.3	29.8	21.9		

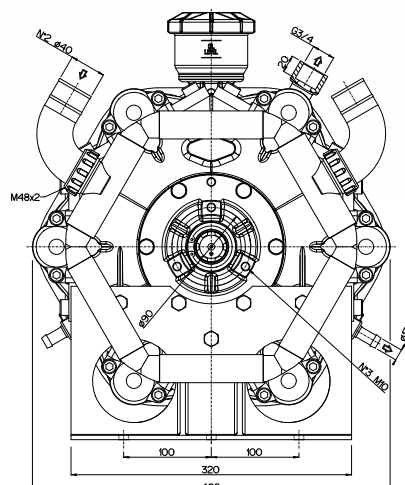
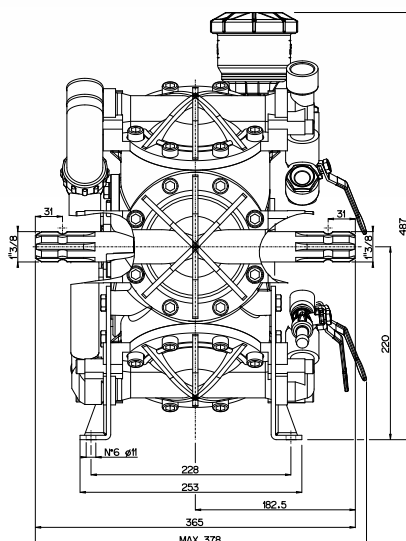


BETA 200 BETA 240

Versioni Versions

Applicazioni Shaft adaptors

TS 2C BETA 200 cod. 835102 - BETA 240 cod. 835202

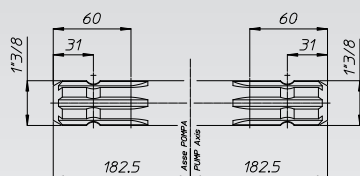

Applicazioni motori
idraulici
Shaft adaptors for hydraulic
motor



MI Δ
vedi pag 94 see page 94

Gruppi regolazione pressione Pressure control units

vedi pag 80 see page 80

VRG 255

