

OMEGA 170

OMEGA 195

Max.: 177 l/min - 47 GPM • 50 bar - 725 PSI • 550 RPM

Max.: 193 l/min - 51 GPM • 50 bar - 725 PSI • 550 RPM

TS 2C

OMEGA 170 cod. 844900
OMEGA 195 cod. 410001

Membrane **GREENTECH** di serie
GREENTECH diaphragm as standard
cod. 090362

MOD.	RPM	0 bar / 0 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				50 bar / 725 PSI					
		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Peso Weight	
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg	lb
OMEGA 170	400	134.3	35.5	1.3	1.0	130.7	34.5	6.9	5.1	130.3	34.3	10.1	7.4	129.3	34.2	13.3	9.7	128.6	34.0	16.5	12.1	46.0	101.4
	450	150.5	39.8	1.5	1.1	146.2	38.6	7.7	5.7	145.3	38.4	11.3	8.3	144.4	38.2	14.8	10.9	143.5	37.9	18.4	13.5		
	500	164.8	43.5	1.6	1.2	158.5	41.9	8.3	6.1	157.4	41.6	12.3	9.0	156.3	41.3	16.0	11.8	155.2	41.0	19.9	14.6		
	550	177.0	47.0	1.8	1.3	169.9	44.9	8.9	6.6	168.6	44.5	13.1	9.7	167.3	44.2	17.2	12.6	166.0	43.9	21.3	15.6		
OMEGA 195	400	147.0	38.9	1.4	1.0	144.8	38.3	7.7	5.8	143.5	37.9	11.3	8.4	142.2	37.6	14.8	11.0	141.0	37.2	18.4	13.7	46.0	101.4
	450	166.0	43.8	1.6	1.2	162.8	43.0	8.7	6.5	161.3	42.6	12.7	9.5	159.9	42.2	16.6	12.4	158.4	41.9	20.6	15.4		
	500	180.0	47.6	1.7	1.3	177.1	46.8	9.5	7.1	175.5	46.4	13.9	10.3	174.0	46.0	18.2	13.6	172.4	45.5	22.5	16.8		
	550	193.0	51.0	1.8	1.4	189.5	50.1	10.1	7.6	187.8	49.6	14.8	11.0	186.2	49.2	19.5	14.5	185.0	48.9	23.7	17.7		

Versioni Versions


TS 2C

OMEGA 170 cod. 844900 - OMEGA 195 cod. 410001

Applicazioni Shaft adaptors

Applicazioni motori idraulici
Shaft adaptors for hydraulic motor

MI
vedi pag 92 see page 92

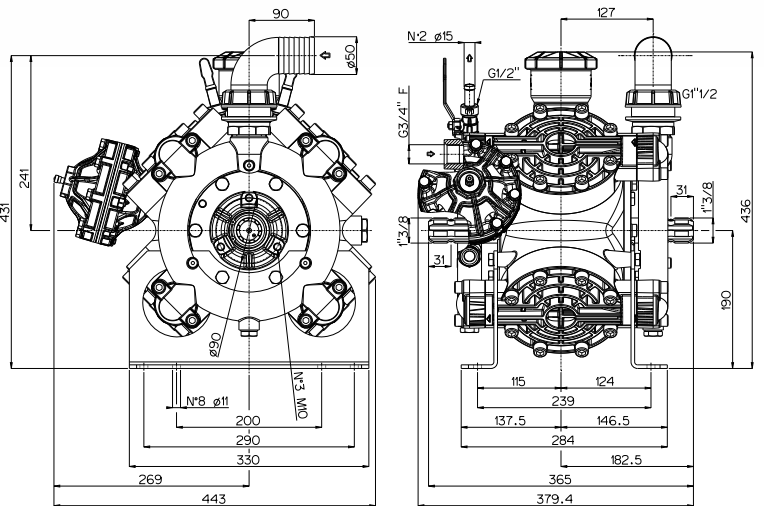

Gruppi regolazione pressione *Pressure control units*

vedi pag. 84-85 see pages 84-85

VRG 255

UHP